



Co-simulation Platform for Train-to-Ground communications

Yan, Ying; Bouaziz, Maha; Kassab, Mohamed; Berbineau, Marion; Soler, José

Publication date:
2018

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Yan, Y., Bouaziz, M., Kassab, M., Berbineau, M., & Soler, J. (2018). *Co-simulation Platform for Train-to-Ground communications*. Paper presented at 20th Nordic Seminar on Railway Technology, Gothenburg, Sweden.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Co-simulation Platform for Train-to-Ground communications

Ying Yan¹, Maha Bouaziz², Mohamed Kassab², Marion Berbineau², José Soler¹

¹ Technical University of Denmark, 2800 Kgs.Lyngby, Denmark

² Univ Lille Nord de France, IFSTTAR, COSYS, F-59650 Villeneuve d'Ascq

Introduction

The project SAFE4RAIL¹ (SAFE architecture for Robust distributed Application Integration in rolling stock) from the Shift2Rail Joint Undertaking will provide a co-simulation platform based on hardware/software co-simulation. The platform will be used for Train-to-Ground (T2G) test environments in the context of the validation of the new wireless Train Control Management System (TCMS) transmission over LTE technologies in order to evaluate performances with realistic services and under various railway traffic conditions.

Architecture and Platform

The test environment (shown in Figure 1) for co-simulation combines the use of a discrete-event network simulator (Riverbed Modeler) and a LTE emulator (OpenAirInterface). We evaluate railway services running on a real mobile device (to mimic the MCG equipment). LTE communication is emulated under realistic conditions between the Mobile Communication Gateway (MCG) equipment and the LTE eNodeB/EPC. The backhaul network that interconnects LTE packet gateway to the Ground Communication Gateway (GCG) of the TCMS, is implemented under the simulated environment. Various network parameters will be evaluated regarding to their impacts on the TCMS performance, e.g., the data rate, the signal coverage, and error rate. Results from the co-simulation reflect measurements from real networks.

Conclusions

We focus on presenting the testing framework as a system-level co-simulation for components of a Train Control Management System (TCMS).

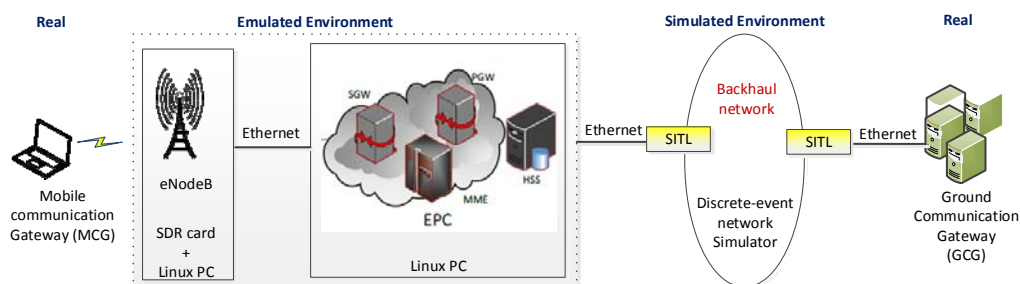


Figure 1 Co-simulation platform for T2G service

References

- Sniady, A., Soler, J., and Dittmann, L. 2015. Communication Technologies Support to Railway Infrastructure and Operations. Ph.D. thesis, DTU Fotonik, 2015, DOI: 10.11581/DTU:00000010.
- Maha Bouaziz, Ying Yan, Mohamed Kassab, José Soler, Marion Berbineau, Train-to-Ground communications of a Train Control and Monitoring Systems: A simulation platform modelling approach, Proceedings of 7th Transport Research Arena TRA 2018, April 16-19, 2018, Vienna, Austria (accepted).
- SAFE4RAIL, 2016. DoA-Part B H2020-S2R-OC-IP1-02-2016.
- OpenAirInterface, 2017. www.openairinterface.org
- Riverbed modeler, 2017. www.riverbed.com

¹This project has received funding from the Shift2Rail Joint Undertaking under grant agreement No 730830. This Joint Undertaking receives support from the European Union's Horizon 2020 research and innovation programme